


Halogen

Electronic Transformer


TRSS-75

PROJECT:	
TYPE:	
CATALOG NUMBER:	
SOURCE:	
NOTES:	

CATALOG NUMBER LOGIC

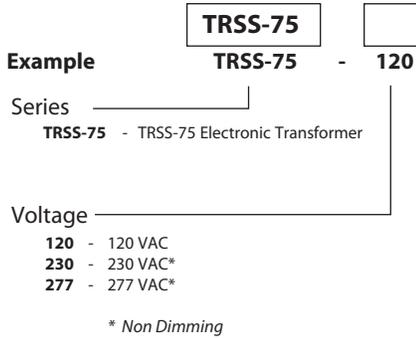

DIMENSIONS

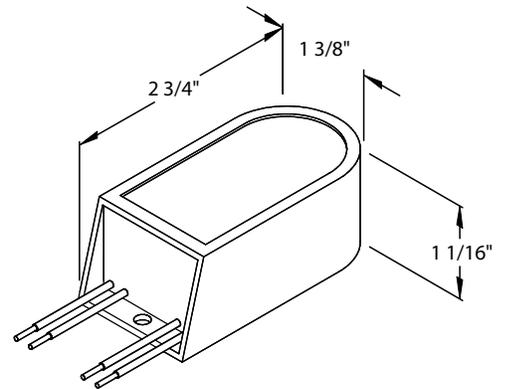

TRANSFORMER DATA

Halogen

Series	Input Voltage	Min. Load Dimmed	Min. Load Non-Dimmed	Max Load
TRSS-75	120V	40W	10W	75W
TRSS-75	230V	N/A	10W	75W
TRSS-75	277V	N/A	10W	75W

Notes: 1. Operating ambient temperature range -10° F to 130° F.
 2. Not to exceed 8 foot overall wiring distance using 12 gauge copper wire.

SPECIFICATIONS

Housing

Fully encapsulated, flame retardant plastic casing. Class A Insulation. For use in weather proof enclosure. Suitable for use in ambient temperatures ranging from -10°F to 130°F.

Electronic Transformer

For use with halogen lamps. 120V, 230V, and 277V primary voltage. 120V is fully dimmable (40W minimum load). 50/60Hz. 11.6V secondary voltage. 10 watt minimum load non-dimmed. 75 watt maximum load. >0.93 Power Factor. <20% THD. Operating frequency >10kHz. Soft start circuitry to extend lamp life.

Warranty

5 year limited warranty.

Listings

UL and CSA listed.



B-K LIGHTING	40429 Brickyard Drive • Madera, CA 93636 • USA 559.438.5800 • FAX 559.438.5900 www.bklighting.com • info@bklighting.com	SUBMITTAL DATE	SUBMITTAL NUMBER
		4-25-11	SUB-001085

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.