

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:



*\*Designed for use with 12 VAC. LED transformer.*

*\*\*For use up to 24" maximum overall height.*

**CATALOG NUMBER LOGIC**

Example: LT-T - 18 - LED - e71 - VER - A18 - SF

**MATERIAL**

Aluminum

**SERIES**

LT-T - Litestick® Pathlight Style 'T'

**STEM LENGTH**

3", 6", 12", 18", 24"

**SOURCE**

LED - with Non-Dimming Integral Driver\*

**LED TYPE**

e70 - 3W LED/2700K      e85 - 3W LED/2700K 90 CRI

e71 - 3W LED/3000K      e86 - 3W LED/3000K 90 CRI

e72 - 3W LED/4000K      e87 - 3W LED/3500K 80 CRI

e73 - 3W LED/Amber

**FINISH (See page 2 for full-color swatches)**

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

**MOUNTING**

PP18B - 18" Power Pipe Stake with 'B' Cap

A18 - 18" Power Pipe with 18" Adjustable Stem

PP-TRe20 - Power Pipe T with 18" Stake, TRe20 Electronic Transformer (105-300 VAC. Hz. non-dimming)\*\*

**OPTIONS**


Stability Flange (For use with Power Pipe)

DATE:


PROJECT:

TYPE:



**A18  
(Mounting Option)**

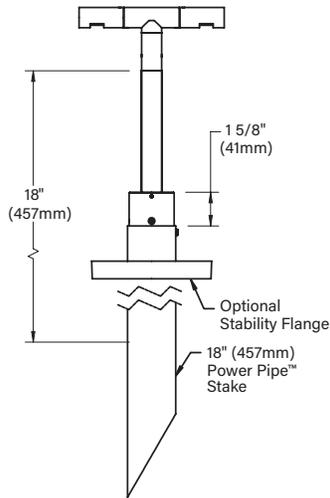

**POWER PIPE  
(Mounting Option)**

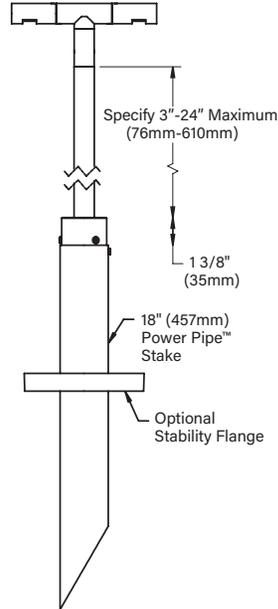


**POWER PIPE  
(‘T’ Mounting Option)**

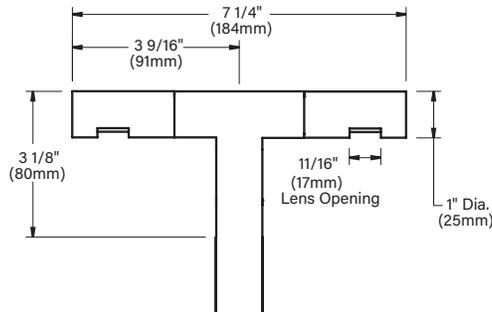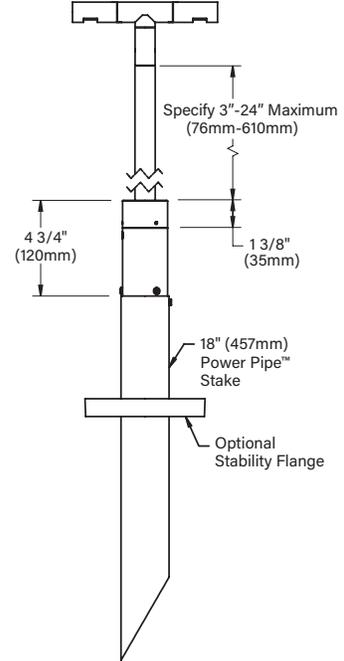

**STANDARD FINISHES**




**PREMIUM FINISHES**

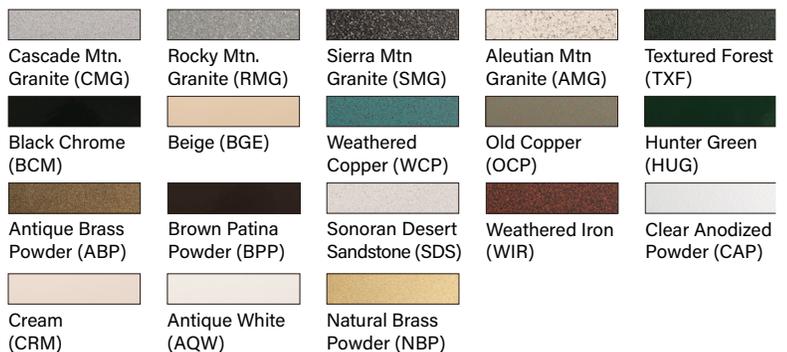

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------


## ACCESSORIES (Configure separately)



TR Series



Power Pipe



UPMRM

## SPECIFICATIONS

ELECTRICAL	WATTAGE	3W LED
	WIRING	PVC coated, 18AWG, 150V, 60°C rated and certified to UL 1838 standard.
PHYSICAL	TRANSFORMER	For use with 12VAC remote transformer or magnetic transformers only. B-K Lighting cannot guarantee performance with third party manufacturers' transformers.
	POWER PIPE WITH TRANSFORMER HOUSING	Additionally features integral transformer housing fully machined from copper-free aluminum. High temperature, silicone 'O' Ring provides water-tight seal. Integral, TRe20 electronic transformer. 105-300VAC primary voltage. 50/60Hz. Non Dimming. 20VA maximum load.
	STYLE	Machined T adapter enables independent fixture adjustment from a single mounting position.
	MATERIALS	Furnished in copper-free aluminum (6061-T6).
	BODY	Unibody design is fully machined from solid billet and provides enclosed, water-proof wireway and integral heat sink for maximum component life. Integral knuckle for maximum mechanical strength. High temperature, silicone 'O' Ring provides water-tight seal.
	CAP	Fully machined from solid billet with 11/16" lens opening. 360° rotation for precise optic positioning. Tamper resistant, stainless steel set screw.
	STEM	Fully machined, 1" dia. with internal threads for maximum visual appeal. Available in configurable lengths to 24" maximum.
	LENS	Shock-resistant, tempered, frosted glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.
	LED	Integrated solid state system and modular design with electrical disconnects allows for easy field upgrade and maintenance. High power, forward throw source complies with ANSI C78.377 binning requirements and exceeds ENERGY STAR® lumen maintenance requirements. LM-80 certified components. Integral, constant current driver. 12VAC/VDC input. 50/60Hz. Proprietary input control scheme achieves power factor correction and eliminates inrush current (limited to <250mA non-dimming). Output, overvoltage, open-circuit, and short circuit protected. Conforms to Safety Std. C22.2 No. 250.13-12.
	POWER PIPE	Provides a clean transition from wiring system to fixture. Schedule 80, 18" PVC housing for direct burial into soil or concrete. Machined 2-1/4" dia. cap for fixture mounting. Optional 6" diameter, molded stability flange, which simplifies installation and projects into substrate to reinforce housing stability. For use with 12VAC remote transformer or magnetic transformers only. B-K Lighting cannot guarantee performance with third party manufacturers' transformers.
POWER PIPE WITH ADJUSTABLE MOUNT	Features 18" Power Pipe and 18" stem which passes through a machined Delrin® bushing within the Power Pipe Cap. Three (3) stainless steel set screws secure fixture position (Not available with integral transformer).	
HARDWARE	Tamper-resistant, stainless steel hardware.	
FINISH	StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Powder coat or metal finish options available for brass material and metal finish option only for stainless steel material.	
WARRANTY	5-year limited warranty.	
CERTIFICATION & LISTING	ITL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4' of the ground. IP66 Rated. Made in the USA with sustainable processes.	

**B-K LIGHTING****MADE IN THE USA**

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

# LAMP & DRIVER DATA (e70, e71, e72, e73)

DATE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_

DRIVER DATA	Input Volts	InRush Current	Operating Current	Operation Ambient Temperature
	12VAC/DC 50/60Hz	<250mA (non-dimmed)	500mA	-22°F-194°F (-30°C - 90°C)

LM79 DATA				L70 DATA	OPTICAL DATA		
BK No.	CCT (Typ.)	CRI (Typ.)	Input Watts (Typ.)	Minimum Rated Life (hrs.) 70% of initial lumens (L <sub>70</sub> )	Beam Type	Angle	Delivered Lumens
e70	2700K	80	3	50,000	Radial	360°h x 270°v w/ Glare Shield	31 13
e71	3000K	80	3	50,000	Radial	360°h x 270°v w/ Glare Shield	32 13
e72	4000K	80	3	50,000	Radial	360°h x 270°v w/ Glare Shield	36 15
e73	Amber (590nm)	~	3	50,000	Radial	360°h x 270°v	~

**B-K LIGHTING**

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

04/22/2020  
SUB-2582-03