K2 - TMB INTEGRAL DRIVER HOUSING

ORDER FIXTURE SEPARATELY.

DATE: PROJECT: TYPE:

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

Example: TMB - D42ARC - BZW - MT

MATERIAL

Aluminum

SERIES

TMB - Tenon Mount Box

DRIVER TYPE*

D34 - 34W Dimming Driver (Standard Dimming 1-100%)

D42 - 42W Dimming Driver (Standard Dimming 1-100%)

D57 - 57W Dimming Driver (Standard Dimming 1-100%)

D34ARC - 34W Dimming Driver (Architectural Dimming 0.1-100%)

D42ARC - 42W Dimming Driver (Architectural Dimming 0.1-100%)

FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)


(Also available in RAL Finishes. See submittal SUB-1439-00)

INPUT VOLTAGE

MT - 120-277 VAC

*For use with 0-10 dimmer. Driver wattage must match fixture wattage.

DATE: PROJECT: TYPE:

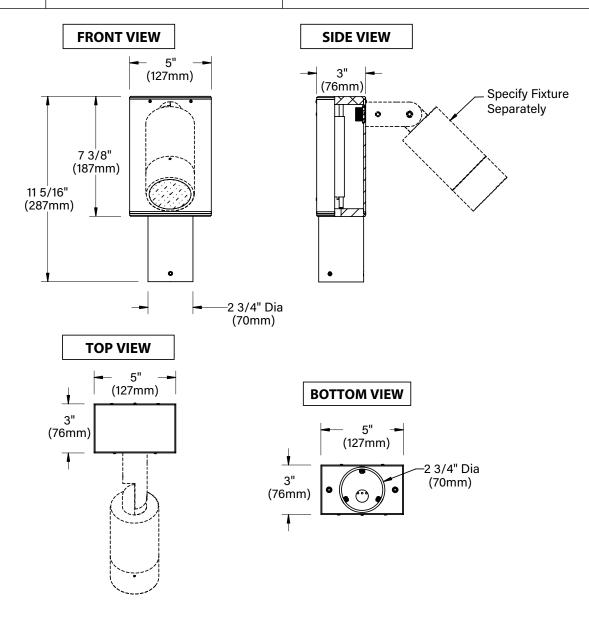

STANDARD FINISHES



<u>Click Here</u> to view larger, full-color swatches of all available finishes on our website.

PREMIUM FINISHES



B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

K	2		Т	N	ΙR	-11	JΤ	F	G	R	Δ	П	Г	١ſ	\supseteq	I١	71	E	R	H	47	\cap	П	IC	ì.	Ν	10	Ġ
r		_		IV	ΙЮ		N I		い	П	и			JΙ	Э.	١١	/		n		ш		u		ונ	I١	ш	

ORDER FIXTURE SEPARATELY.

DATE: PROJECT: TYPE:

Accessories (Configure separately)

SPECIFICATIONS

Electrical	WIRING / CONNECTORS	Teflon® coated wire, 18 gauge, 600V, 250° C rated and certified to UL 1659 standard. Pre-wired and labeled terminal strip.								
	DRIVER (34-52W)	One (1) 1.05A (D34, D42) or 1.4A (D57), Class A, constant current driver. 120-277VAC (nominal) primary input voltage. 50/60Hz. >0.90 Power Factor, 10.0A in-rush current, .20%THD (nominal at 120VAC full load). Output over-voltage, over-current, and short circuit protection with auto recovery. EMC: FCC47CFR Part 15 Class B compliant. Dimming driver for use with standard 0-10V dimmers and switch controls. Refer to driver electrical data for dimming range.								
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6).								
	INSTALLATION	For mounting to 2" IPS (2-3/8" O.D.) Tenon. Removeable bottom with Neoprene gasket. 2-1/2" I.D. slip fitter. Accepts 360SL and 360HD adjustable mounting systems, allows rotational adjustment with 'O' Ring seal and tamper-resistant design.								
	FINISH	StarGuard, our 15-stage, chromate-free rocess cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant.								
	WARRANTY	5-year limited warranty.								
	CERTIFICATION & LISTING	Certified to CAN/CSA/ANSI standards. UL Listed. RoHS compliant. Made in USA with sustainable processes.								



