

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

Example: PM1DRM - TS-24- TRSS75 - SAP - 120 - MB

MATERIAL

Aluminum

SERIES

PM1DRM - Universal Power Module 1 Dual Remote

MOUNTING

TS-Length - Tree Strap (Specify adjustable strap length) 18" Standard Min.

TRANSFORMER TYPE

TRSS75 - (2) 75VA Electronic Transformers*

TRe20 - (2) TRe20 Electronic Transformers**

FINISH

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

(Also available in RAL Finishes. See submittal SUB-1439-00)

INPUT VOLTAGE

(Blank) - For use with TRe20 Electronic Transformers**

120 - 120 VAC (For use with TRSS75)

230 - 230 VAC*** (Electronic only, for use with TRSS75)

277 - 277 VAC*** (For use with TRSS75)

OPTIONS

SC - Safety Cable for use with Tree Strap Mount. Cable length to match strap length. 18" Standard Min.

MB - Mounting Brackets


*For use with MR16 LED and Halogen lamps.

**For use with LED fixtures. 105-300 VAC. 50/60 Hz. non-dimming.


***Non-dimming.

DATE: _____ PROJECT: _____ TYPE: _____



FRONT VIEW

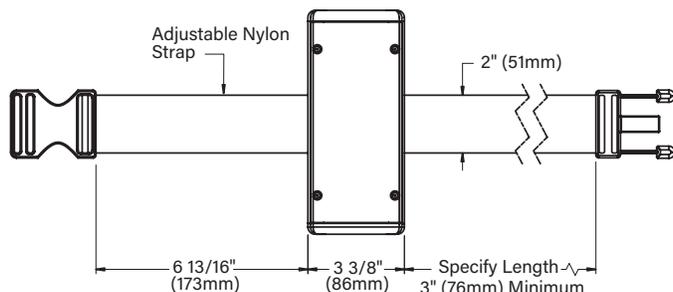

END VIEW



SAFETY CABLE

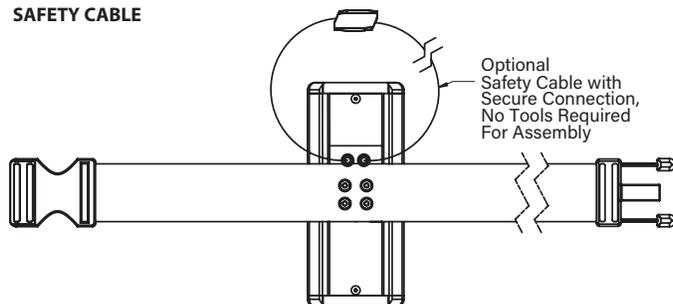

SIDE VIEW

⚠ REMOTE WIRING


Electronic Transformer

Remote transformer installations require inter-connected wiring between the lamp and transformer (by others). Electronic transformers have specific wiring requirements between these components. Transformer manufacturers regularly recommend the following wiring details for such installations:

- Do not exceed 8 foot overall wiring distance using 12 gauge copper wire.

Please consult the factory through your local B-K Lighting Sales Representative prior to finalizing any installation detail utilizing remote transformer wiring.

Failure to comply with specific wiring requirements will void product warranty.

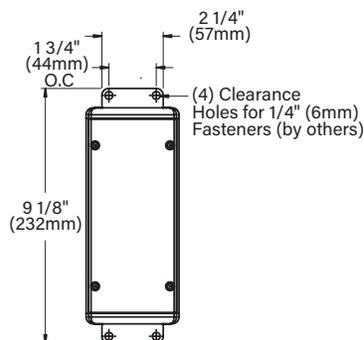

OPTIONAL MOUNTING BRACKET

STANDARD FINISHES



PREMIUM FINISHES



[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

Electrical	TRSS-75 TRANSFORMER	For use with halogen lamps. Two (2) 75VA electronic low voltage transformers for use with single or split switch loads. 120, 230, or 277VAC primary voltage. 120V is dimmable (40W minimum load) using electronic low voltage dimmer. 10 watt minimum load (non-dimmed). 50/60Hz. 11.6VAC secondary voltage. >.93 Power Factor. <20% THD. Operating frequency >10kHz. Primary overload protection and RFI filtration. Soft start circuitry extends lamp life.
	TRe20 ELECTRONIC TRANSFORMER	One (1) 20VA electronic low voltage transformer 105-330VAC primary voltage. 1W minimum load. 20W maximum load. 50/60Hz. Non-dimming. 12VDC secondary voltage. >90% Power Factor. >80% efficiency (under full load). Inrush current limited to <5A max. Thermal shutdown with auto-restart. Overload, short circuit, and open circuit protection.
PHYSICAL	TREE INSTALLATION	Tree Strap mounting system facilitates non-invasive installation. Adjustable nylon strap is mold and mildew resistant and will not hinder tree growth. Stainless steel safety cable maintains UPM mounting when nylon strap is disengaged.
	HOUSING	Copper free, aluminum extrusion with die cast end caps. Surface mounted with flow through back channel to prevent water and debris collection. Machined aluminum cover with countersunk holes for flush hardware installation. Tamper-resistant, captive, black oxide stainless steel mounting screws. Front access for ease of installation and inspection. Two (2) 3/4" NPT female conduit entries per end cap for through wiring.
	INSTALLATION TETHER	Stainless steel cable with integral loop allows cover to temporarily suspend from housing during installation to simplify wire connection and component attachment.
	PATENTED KNOCKOUTS	Four (4) 3/4" NPT, machined aluminum knockouts. High temperature, silicone 'O' Ring for water-tight seal. Patented design allows knockout to be reinserted without compromising seal integrity.
	FINISH	StarGuard, our 15-stage, chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Finish to match fixture. (specified separately).
	WARRANTY	5-year limited warranty.
	CERTIFICATION & LISTING	Certified to CAN/CSA/ANSI Standards. UL Listed. NEMA 4X / IP66 Rated Enclosure. RoHs compliant. Made in USA with sustainable processes.



PM1DRM REMOTE LOW VOLTAGE TRANSFORMERS (SURFACE MOUNT) ORDER FIXTURES SEPARATELY.

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

Example: PM1DRM - SM- TRSS75 - SAP - 120

MATERIAL

Aluminum

SERIES

PM1DRM - Universal Power Module 1 Dual Remote

MOUNTING

SM - Surface Mount

TRANSFORMER TYPE

TRSS75 - (2) 75VA Electronic Transformers*

TRe20 - (2) TRe20 Electronic Transformers**

FINISH

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

(Also available in RAL Finishes. See submittal SUB-1439-00)

INPUT VOLTAGE

(Blank) - For use with TRe20 Electronic Transformers**

120 - 120 VAC (For use with TRSS75)

230 - 230 VAC*** (Electronic only, for use with TRSS75)

277 - 277 VAC*** (For use with TRSS75)

*For use with MR16 LED and Halogen lamps.

**For use with LED fixtures. 105-300 VAC. 50/60 Hz. non-dimming.

***Non-dimming.


B-K LIGHTING

MADE IN THE USA


559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

PM1DRM REMOTE LOW VOLTAGE TRANSFORMERS (SURFACE MOUNT) ORDER FIXTURES SEPARATELY.

DATE: _____ PROJECT: _____ TYPE: _____

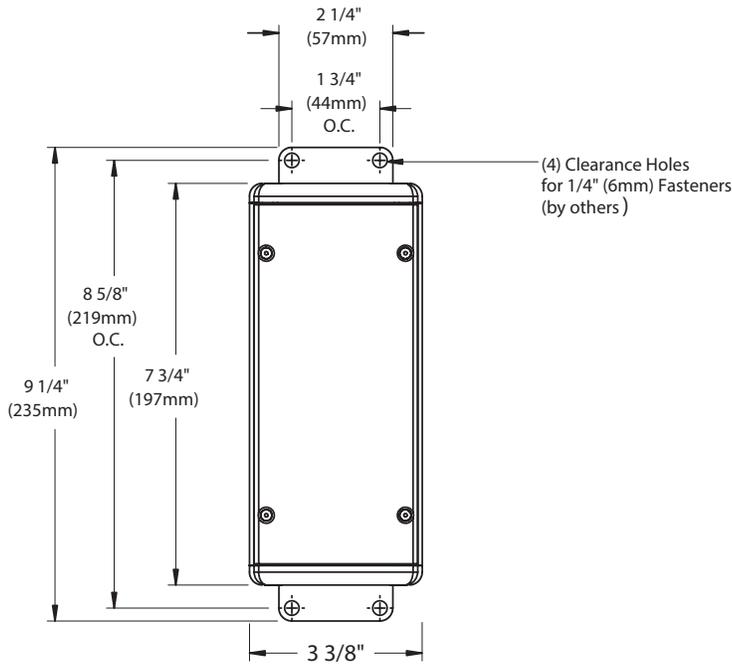

TOP VIEW

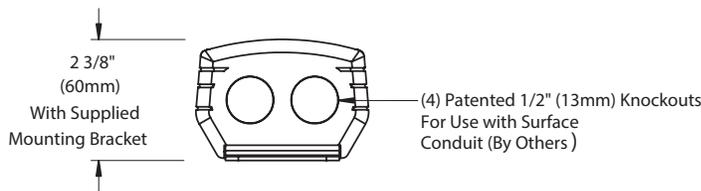

END VIEW

REMOTE WIRING


Electronic Transformer

Remote transformer installations require interconnected wiring between the lamp and transformer (by others). Electronic transformers have specific wiring requirements between these components. Transformer manufacturers regularly recommend the following wiring details for such installations:

- Do not exceed 8 foot overall wiring distance using 12 gauge copper wire.

Please consult the factory through your local B-K Lighting Sales Representative prior to finalizing any installation detail utilizing remote transformer wiring.

Failure to comply with specific wiring requirements will void product warranty.

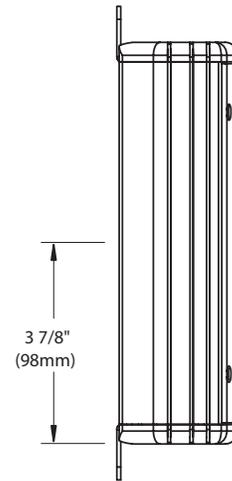


SIDE VIEW

STANDARD FINISHES



PREMIUM FINISHES

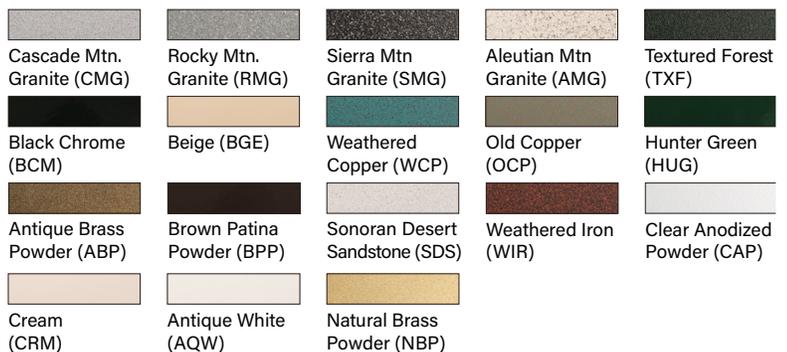

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

PM1DRM REMOTE LOW VOLTAGE TRANSFORMERS (SURFACE MOUNT) ORDER FIXTURES SEPARATELY.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

Electrical	TRSS-75 TRANSFORMER	For use with halogen lamps. Two (2) 75VA electronic low voltage transformers for use with single or split switch loads. 120, 230, or 277VAC primary voltage. 120V is dimmable (40W minimum load) using electronic low voltage dimmer. 10 watt minimum load (non-dimmed). 50/60Hz. 11.6VAC secondary voltage. >.93 Power Factor. <20% THD. Operating frequency >10kHz. Primary overload protection and RFI filtration. Soft start circuitry extends lamp life.
	TRe20 ELECTRONIC TRANSFORMER	One (1) 20VA electronic low voltage transformer 105-330VAC primary voltage. 1W minimum load. 20W maximum load. 50/60Hz. Non-dimming. 12VDC secondary voltage. >90% Power Factor. >80% efficiency (under full load). Inrush current limited to <5A max. Thermal shutdown with auto-restart. Overload, short circuit, and open circuit protection.
PHYSICAL	SURFACE MOUNT	For use with side entry, surface conduits. Stainless steel mounting brackets provide for direct anchor to architectural surfaces in any orientation.
	HOUSING	Copper free, aluminum extrusion with die cast end caps. Surface mounted with flow through back channel to prevent water and debris collection. Machined aluminum cover with countersunk holes for flush hardware installation. Tamper-resistant, captive, black oxide stainless steel mounting screws. Front access for ease of installation and inspection. Two (2) 3/4" NPT female conduit entries per end cap for through wiring.
	INSTALLATION TETHER	Stainless steel cable with integral loop allows cover to temporarily suspend from housing during installation to simplify wire connection and component attachment.
	PATENTED KNOCKOUTS	Four (4) 3/4" NPT, machined aluminum knockouts. High temperature, silicone 'O' Ring for water-tight seal. Patented design allows knockout to be reinserted without compromising seal integrity.
	FINISH	StarGuard, our 15-stage, chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Finish to match fixture. (specified separately).
	WARRANTY CERTIFICATION & LISTING	5-year limited warranty. Certified to CAN/CSA/ANSI Standards. UL Listed. NEMA 4X / IP66 Rated Enclosure. RoHs compliant. Made in USA with sustainable processes.



B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

Example: PM1DRM - CT- TRSS75 - SAP - 120 - MB

MATERIAL

Aluminum

SERIES

PM1DRM - Universal Power Module 1 Dual Remote

MOUNTING

CR - Round Camlock Canopy (Recessed Junction Box)

CT - Rectangular Camlock Canopy (Recessed Junction Box)

TRANSFORMER TYPE

TRSS75 - (2) 75VA Electronic Transformers*

TRe20 - (2) TRe20 Electronic Transformers**

FINISH

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

(Also available in RAL Finishes. See submittal SUB-1439-00)

INPUT VOLTAGE

(Blank) - For use with TRe20 Electronic Transformers**

120 - 120 VAC (For use with TRSS75)

230 - 230 VAC*** (Electronic only, for use with TRSS75)

277 - 277 VAC*** (For use with TRSS75)

OPTIONS


MB - Mounting Brackets

*For use with MR16 LED and Halogen lamps.

**For use with LED fixtures. 105-300 VAC. 50/60 Hz. non-dimming.


***Non-dimming.

DATE: _____ PROJECT: _____ TYPE: _____

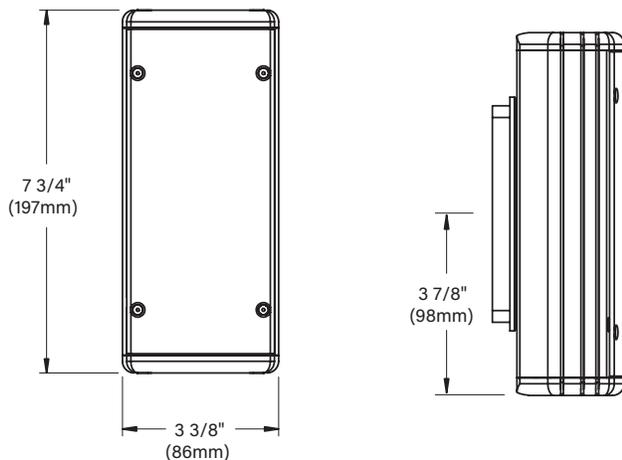

FRONT VIEW

SIDE VIEW

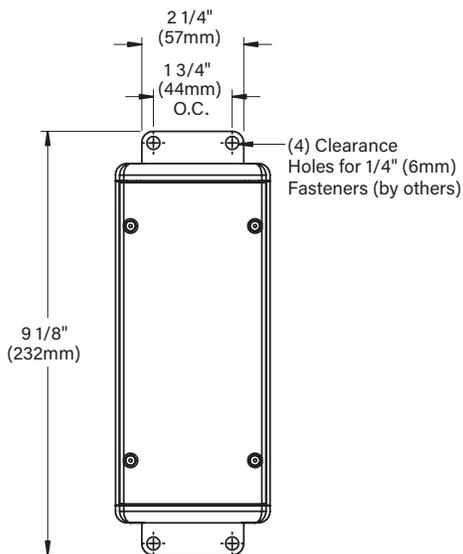

OPTIONAL MOUNTING BRACKET

⚠ REMOTE WIRING


Electronic Transformer

Remote transformer installations require interconnected wiring between the lamp and transformer (by others). Electronic transformers have specific wiring requirements between these components. Transformer manufacturers regularly recommend the following wiring details for such installations:


- Do not exceed 8 foot overall wiring distance using 12 gauge copper wire.

Please consult the factory through your local B-K Lighting Sales Representative prior to finalizing any installation detail utilizing remote transformer wiring.

Failure to comply with specific wiring requirements will void product warranty.



ROUND CAMLOCK™ CANOPY



RECTANGULAR CAMLOCK™ CANOPY

STANDARD FINISHES



PREMIUM FINISHES



[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

Electrical	TRSS-75 TRANSFORMER	For use with halogen lamps. Two (2) 75VA electronic low voltage transformers for use with single or split switch loads. 120, 230, or 277VAC primary voltage. 120V is dimmable (40W minimum load) using electronic low voltage dimmer. 10 watt minimum load (non-dimmed). 50/60Hz. 11.6VAC secondary voltage. >.93 Power Factor. <20% THD. Operating frequency >10kHz. Primary overload protection and RFI filtration. Soft start circuitry extends lamp life.
	TRe20 ELECTRONIC TRANSFORMER	One (1) 20VA electronic low voltage transformer 105-330VAC primary voltage. 1W minimum load. 20W maximum load. 50/60Hz. Non-dimming. 12VDC secondary voltage. >90% Power Factor. >80% efficiency (under full load). Inrush current limited to <5A max. Thermal shutdown with auto-restart. Overload, short circuit, and open circuit protection.
PHYSICAL	ROUND CAMLOCK CANOPY (RECESSED JUNCTION BOX)	5" dia., machined aluminum construction. Includes stainless steel universal mounting ring for use with 4" octagonal junction box. Two (2) tamper-resistant, black oxide stainless steel mounting screws. 1/8" thick HT-805A silicone foam gasket for water-tight seal. Integral Camlock provides additional 30° adjustment for precision alignment of UPM regardless of junction box orientation. Integral wiper seal maintains water-tight integrity between UPM and junction box. Optional stainless steel mounting brackets may be specified to provide additional anchor to architectural surface.
	RECTANGULAR CAMLOCK CANOPY (RECESSED JUNCTION BOX)	Copper free, aluminum extrusion with die cast end caps. Surface mounted with flow through back channel to prevent water and debris collection. Machined aluminum cover with countersunk holes for flush hardware installation. Tamper-resistant, captive, black oxide stainless steel mounting screws. Front access for ease of installation and inspection. Two (2) 1/2" NPT female conduit entries per end cap for through wiring.
	HOUSING	Copper free, aluminum extrusion with die cast end caps. Surface mounted with flow through back channel to prevent water and debris collection. Machined aluminum cover with countersunk holes for flush hardware installation. Tamper-resistant, captive, black oxide stainless steel mounting screws. Front access for ease of installation and inspection. Two (2) 3/4" NPT female conduit entries per end cap for through wiring.
	INSTALLATION TETHER	Stainless steel cable with integral loop allows cover to temporarily suspend from housing during installation to simplify wire connection and component attachment.
	PATENTED KNOCKOUTS	Four (4) 3/4" NPT, machined aluminum knockouts. High temperature, silicone 'O' Ring for water-tight seal. Patented design allows knockout to be reinserted without compromising seal integrity.
	FINISH	StarGuard, our 15-stage, chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Finish to match fixture. (specified separately).
	WARRANTY CERTIFICATION & LISTING	5-year limited warranty. Certified to CAN/CSA/ANSI Standards. UL Listed. NEMA 4X / IP66 Rated Enclosure. RoHs compliant. Made in USA with sustainable processes.

