


# MICRO NITE STAR - RING MOUNT (MR11 LED LAMP)

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:

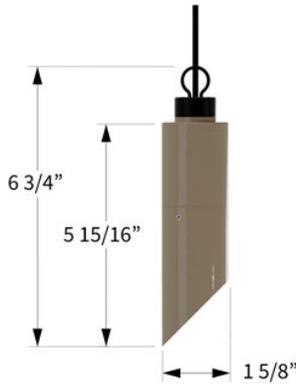

## CATALOG NUMBER LOGIC

Example: RM - 5 - MN - MR - 0 - BZP - 9 - 11 - E

## MATERIAL

(Blank) - Aluminum B - Brass

## SERIES

RM - Ring Mount

## LEAD LENGTH

5 - 5 Ft. of Lamp Leads and Cable

25 - 25 Ft. of Lamp Leads and Cable

## FIXTURE

MN - Micro Nite Star

## SOURCE

MR - MR11 Lamp

## LAMP TYPE

0 - MR11 Halogen Lamp (Sourced by others)

## FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

Brass Finishes (MAC, POL, MIT)

## LENS TYPE

9 - Clear (Standard)

10 - Spread    12 - Soft Focus    13 - Rectilinear

## SHIELDING

11 - Honeycomb Baffle

## CAP STYLE


C - Flush

D - 45° Less Weephole (Interior use only)

E - 90° Less Weephole (Interior use only)

# MICRO NITE STAR - RING MOUNT (MR11 LED LAMP)

DATE: \_\_\_\_\_ PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_

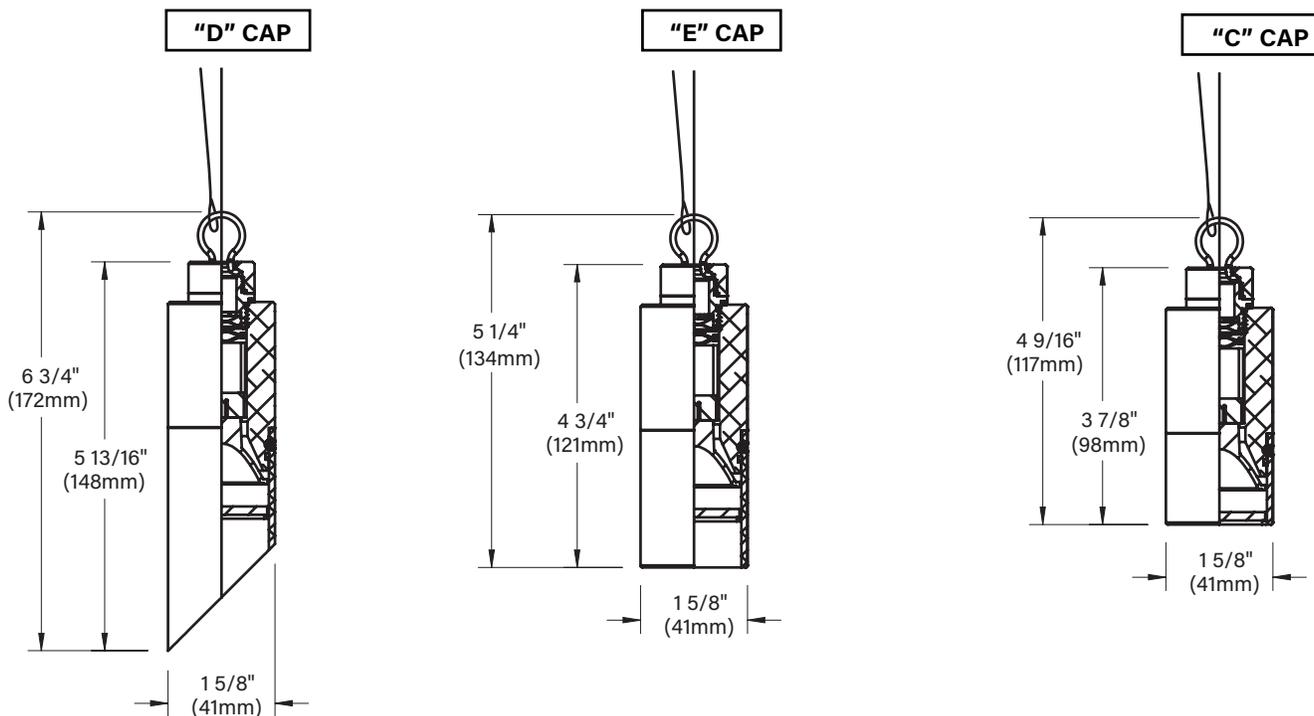

## STANDARD FINISHES



## PREMIUM FINISHES



[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

**B-K LIGHTING**

**MADE IN THE USA**


559.438.5800 | [INFO@BKLIGHTING.COM](mailto:INFO@BKLIGHTING.COM) | [BKLIGHTING.COM](http://BKLIGHTING.COM)

# MICRO NITE STAR - RING MOUNT (MR11 LED LAMP)

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

Drivers (Configure separately)

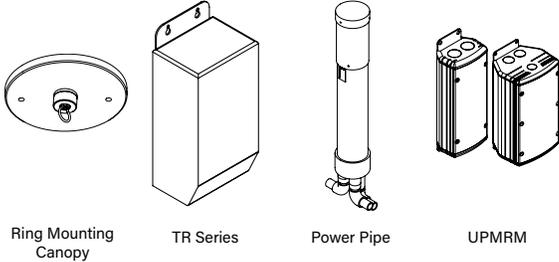

## SPECIFICATIONS

ELECTRICAL	<p>WATTAGE WIRING SOCKET TRANSFORMER</p>	<p>20W Maximum</p> <p>Teflon® coated wire, 18AWG, 600V, 250° C rated and certified to UL1659 standard.</p> <p>Outdoor rated, 12Ga., 30V, 60°C rated and certified to UL 1838 standard. Anti-Siphon Valve (ASV™) prevents “wicking through conductor insulation.</p> <p>For use with 12 VAC remote transformer.</p>
PHYSICAL	<p>MATERIALS BODY MOUNTING RING CAP LENS LAMP HARDWARE FINISH WARRANTY CERTIFICATION &amp; LISTING</p>	<p>Furnished in copper-free aluminum (6061-T6) or brass (360).</p> <p>Unibody design is fully machined from solid billet and provides enclosed, water-proof wireway and heat sink to maximize lamp life. Integral knuckle for maximum mechanical strength. High temperature, silicon ‘O’ Ring provides water-tight seal.</p> <p>¾” O.D. black oxide stainless steel mounting ring allows for cable or hook mounting. Machined aluminum endcap in black anodize finish for maximum corrosion resistance provides water tight enclosure with fully potted antiwicking LED connectors. 5’ or 25’ 12Ga., 2 wire low voltage cable from fixture body to facilitate external wire splice. Fixture is suspended by 1/32” strand stainless steel safety cable with oval sleeve.</p> <p>Fully machined. Accommodates [2] lens or louver media. Choose from 45° cutoff (‘D’), 1” deep bezel with 90° cutoff (‘E’) or flush lens (‘C’) cap styles.</p> <p>Shock-resistant, tempered glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.</p> <p>For use with 20W maximum, MR11 lamp. Halogen sourced by others.</p> <p>Tamper-resistant, stainless steel hardware. LOCK aiming screw is black oxide treated for additional corrosion resistance.</p> <p>StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class ‘A’ TGIC polyester powder coating and is RoHS compliant. Brass components are available in powder coat or handcrafted metal finish. Stainless steel components are only available in handcrafted metal finish.</p> <p>5-year limited warranty.</p> <p>UL Listed. Certified to CAN/CSA/ANSI standards. RoHS compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4’ of the ground. Made in the USA with sustainable processes.</p>



<b>B-K LIGHTING</b>	<b>MADE IN THE USA</b>	559.438.5800   <a href="mailto:INFO@BKLIGHTING.COM">INFO@BKLIGHTING.COM</a>   <a href="http://BKLIGHTING.COM">BKLIGHTING.COM</a>
---------------------	------------------------	--