

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:




*Lamp details available on the 3rd page.

CATALOG NUMBER LOGIC
Example: PTR - 3 - 26 - MR - RM - 0 - BLP - 10 - 11 - C
MATERIAL
Aluminum
SERIES
PTR - Palm Tree Ring
FIXTURE QUANTITY
2 - 2 @ 180° 4 - 4 @ 90°
3 - 3 @ 120° 6 - 6 @ 60°
STRAP SIZES
16 - 16" min. to 22" max. tree diameter
21 - 21" min. to 27" max. tree diameter
26 - 26" min. to 32" max. tree diameter
31 - 31" min. to 38" max. tree diameter
SOURCE
MR - MR16 Lamp
HOUSING
RM - Remote Transformer
LAMP TYPE
0 - MR16 HALOGEN LAMP (Furnished by Others)
MR16 LED (This choice requires lamp number selection)*
FINISH (See page 2 for full-color swatches)
Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)
Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)
Also available in RAL Finishes
LENS TYPE
9 - Clear (Standard) 10 - Spread
12 - Soft Focus 13 - Rectilinear
SHIELDING
11 - Honeycomb Baffle (per fixture)
CAP STYLE
A - 45° (per fixture)
B - 90° (per fixture)
C - Flush
F - 90° with Flush Lens (per fixture)

DATE:

PROJECT:


TYPE:

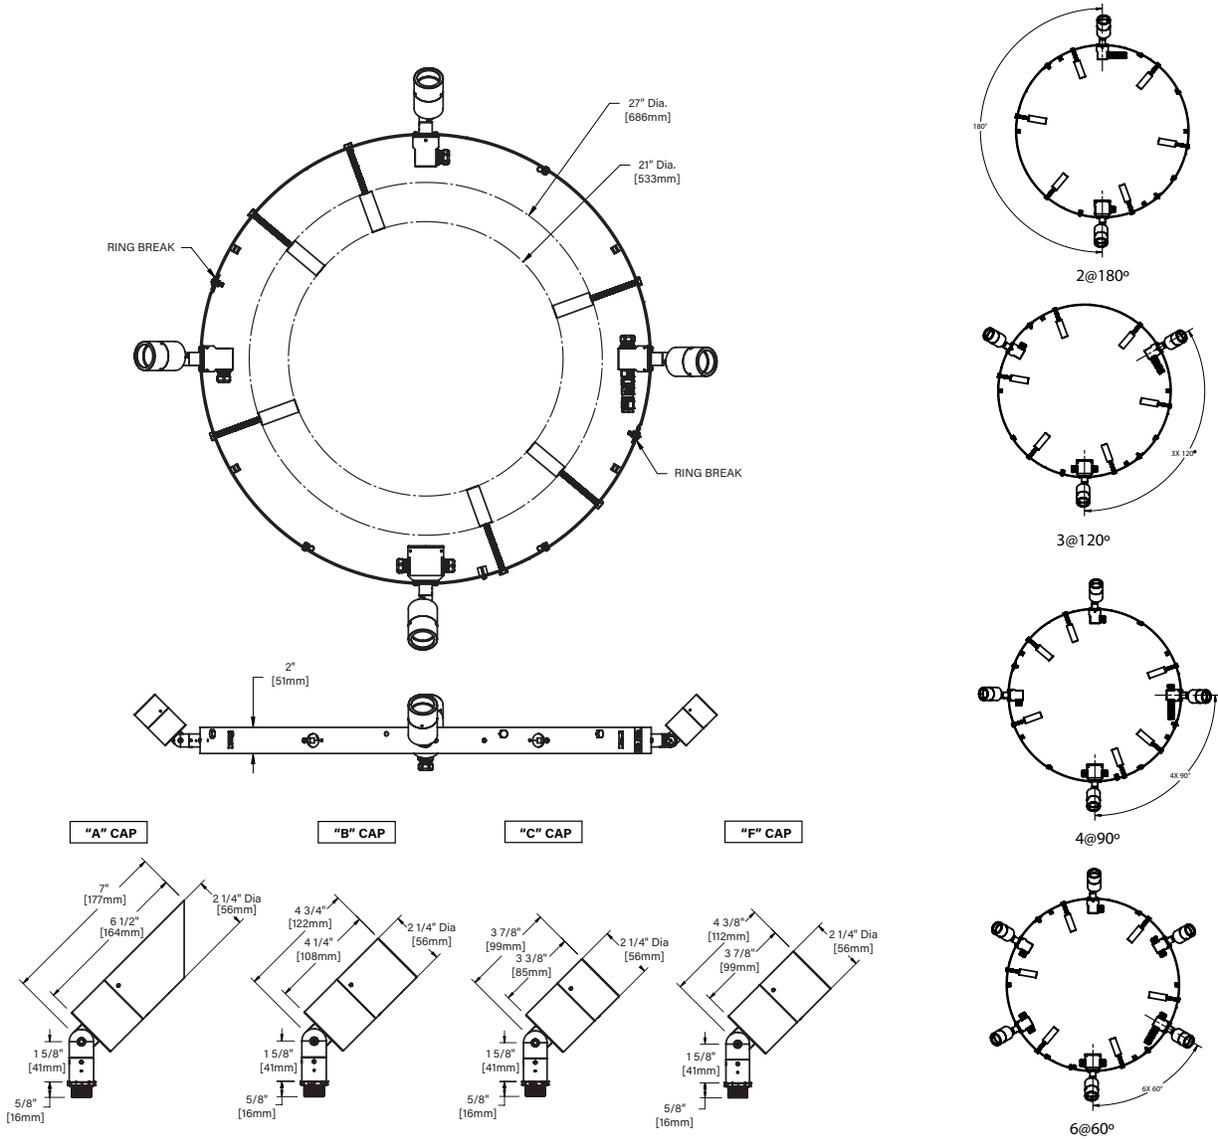

STANDARD FINISHES




PREMIUM FINISHES

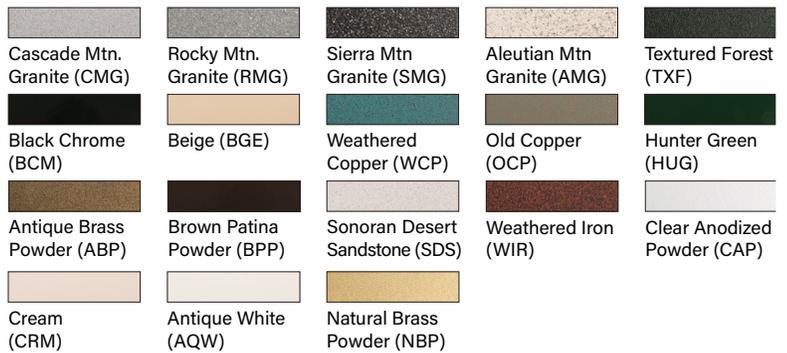

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE: _____ PROJECT: _____ TYPE: _____

ACCESSORIES (Configure separately)



TR Series

SPECIFICATIONS

ELECTRICAL	WATTAGE	7.5W
	WIRING	SJEOOW,14/2GA,105C,300V. Nylon Cord Grip for secondary wiring from power supply. (Secondary wiring by Others.) Min. Cable Dia .230" Max. Cable Dia .546"
	TRANSFORMER	For use with 12 volt remote transformer.
PHYSICAL	MATERIALS	Palm Tree Ring - 1/8" thick AISI 304 stainless steel. Fixture - copper-free aluminum (6061-T6).
	BODY	Unibody design is fully machined from solid billet and provides enclosed, water-proof wireway and integral heat sink for maximum component life. Integral knuckle for maximum mechanical strength. High temperature, silicone 'O' Ring provides water-tight seal.
	KNUCKLE	360SL knuckle provides biaxial source control with 360° horizontal rotation in addition to vertical adjustment.
	CAP	Fully machined and accommodates two (2) lens or louver media.
	LENS	Shock-resistant, tempered glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.
	LAMP	For use with 50W maximum, bi-pin MR16 lamps. Not for use with IR technology lamps. Halogen sourced by others. *Except GE Light Q42MR16/C/VNSP9 (EZY).
	SOCKET	Specification grade, ceramic body lamp holder. GU5.3 base. Nickel allow contacts and heat resistant, spring loaded, stainless steel lamp retaining clips.
	HARDWARE	Tamper-resistant, stainless steel hardware. LOCK aiming screw is black oxide treated for additional corrosion resistance.
	FINISH	StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Powder coat or metal finish options available for brass material and metal finish option only for stainless steel material.
	WARRANTY	5-year limited warranty.
CERTIFICATION & LISTING	ITL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Suitable for indoor or outdoor use and in wet locations. IP66 Rated. Made in the USA with sustainable processes.	

