

DATE: PROJECT: TYPE:

CATALOG NUMBER LOGIC:



\*120v only.

**CATALOG NUMBER LOGIC**

Example: YO - LED - TR - x130 - WW - BLP - 9 - 11 - CV - INC - MT

**MATERIAL**

Aluminum

**SERIES**

YO - Yosemite

**SOURCE**

LED - Chip on Board Technology

**HOUSING**

TR - Integral Driver

**LED TYPE**

x130 - 23W LED/2700K	x113 - 34W LED/2700K
x131 - 23W LED/3000K	x114 - 34W LED/3000K
x133 - 23W LED/4000K	x116 - 34W LED/4000K

**OPTICS**

WW - Wall Wash

**FINISH (See page 2 for full-color swatches)**

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

**LENS TYPE**

9 - Clear (Standard)

**SHIELDING**

11 - Honeycomb Baffle

**ACCESSORIES**

CV - Cutoff Visor

CS - Cutoff Snoot

BD - Adjustable Barn Boors

**CONTROL OPTION**

ELV - Dimming Driver (For use with Electronic Low Voltage Dimmer)

INC - Dimming Driver (For use with Incandescent Dimmer)

0-10 - Dimming Driver (For use with 0-10 Dimmer)


**INPUT VOLTAGE**

MT - 120-277 VAC


DATE:

PROJECT:


TYPE:

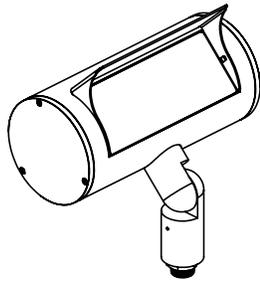


CUTOFF VISOR

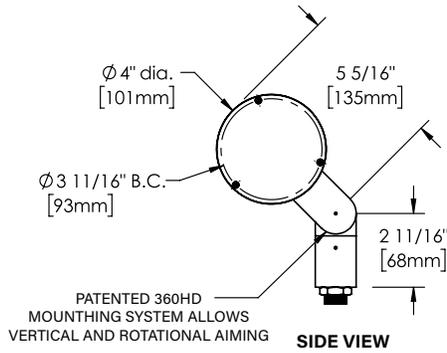


SIDE VIEW

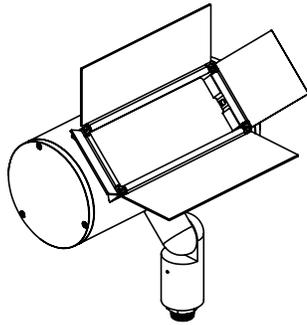


BARN DOOR

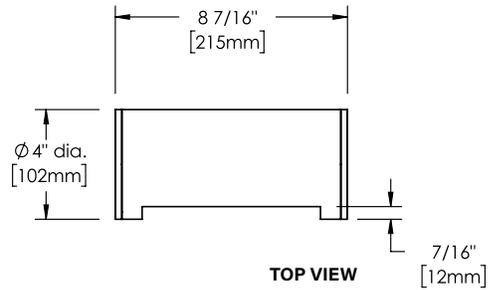

TOP VIEW

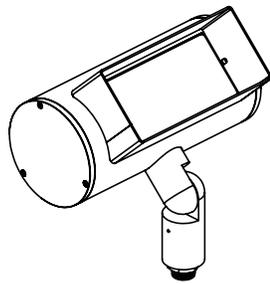

CUTOFF SNOOT

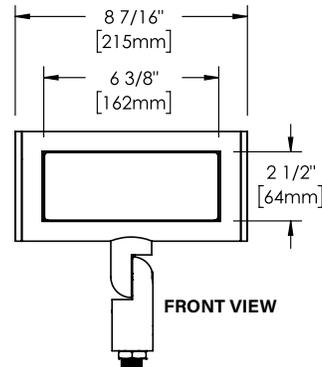


FRONT VIEW

STANDARD FINISHES




PREMIUM FINISHES

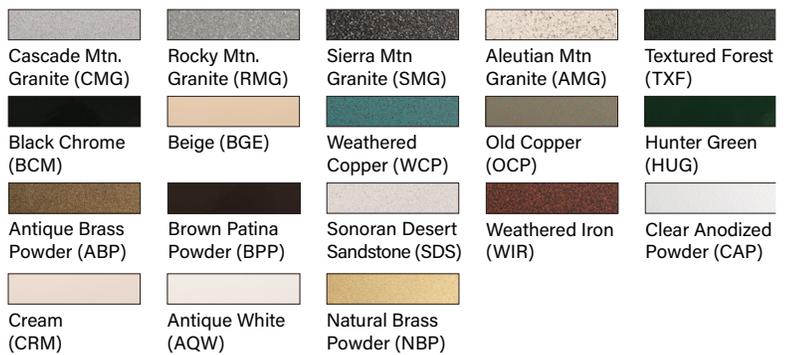

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)



PM3DJ & PM3J

## SPECIFICATIONS

ELECTRICAL	WATTAGE	23W or 34W LED
	WIRING	XLPE coated, 18AWG, 600V, 150° C rated and certified to UL 1569 standard.
	DRIVER	With one (1) 600mA or 900mA, Class II, constant current integral driver. 50/60Hz. >0.9 Power Factor, 5A in-rush current (typical at 120VAC), ≤20%THD (nominal at 120VAC full load). Output over-voltage, over-current, and short circuit protection with auto recovery. Dimming driver for use with 0-10V, Incandescent, Standard TRIAC, or ELV dimmers. 1-100% range. *TRIAC/ELV dimming at 120VAC only
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6).
	BODY	Enclosed, water-proof wireway with machined end caps gasketed to create a water-tight seal for optical compartment.
	KNUCKLE	360HD Mounting System features a mechanical taperlock, allowing full 180° vertical adjustment without the use of aim-limiting serrated teeth. High temperature, silicone 'O' Ring provides water-tight seal and compressive resistance to maintain fixture position. Design withstands 73 lbs. static load prior to movement for optical alignment with a ½" pipe thread for mounting. Biaxial source control additionally provides 360° horizontal rotation in addition to vertical adjustment. Aim & Lock technology allows precision adjustment without the redundant tightening and loosening of knuckle screw. 360HD hardware is stainless steel with black oxide treatment for additional corrosion resistance.
	LENS	Shock-resistant, tempered glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.
	LED	Integrated solid state system and modular design with electrical disconnects allow for easy field upgrade and maintenance. LM-80 certified. Minimum 50,000 hour rated life at 70% of initial lumens (L70). LED technology provides long life, significant energy reduction and exceptional thermal management.
	COLOR MANAGEMENT	Chip on board technology delivers natural white light. Exact color point conformity exceeds ANSI C78.377 standard. Module exceeds 80 CRI (RA>80, R9.16). Color point uniformity 2 SDCM color control for 2700K-4000K CCT.
	ACCESSORIES	Three (3) accessory options for optimum lighting control.
	HARDWARE	Tamper-resistant, stainless steel hardware. LOCK hardware is black oxide treated for additional corrosion resistance.
	FINSIH	StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant.
	WARRANTY	5-year limited warranty.
CERTIFICATION & LISTING	UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4' of the ground. IP65 Rated. Made in the USA with sustainable processes.	
  		

**B-K LIGHTING**

**MADE IN THE USA**

559.438.5800 | [INFO@BKLIGHTING.COM](mailto:INFO@BKLIGHTING.COM) | [BKLIGHTING.COM](http://BKLIGHTING.COM)

# LAMP & DRIVER DATA

DATE:	PROJECT:	TYPE:
-------	----------	-------

## LM79DATA

## L70 DATA

BK No.	Delivered Lumens	CCT (Typ.)	CRI (Ra. Typ.)	InputWatts (Typ.)	Minimum Rated Life (hrs.) 70% of Initial Lumens (L70)
x130	1884	2700K	80	23	50,000
<b>x131</b>	<b>1924</b>	<b>3000K</b>	<b>80</b>	<b>23</b>	<b>50,000</b>
x133	1965	4000K	80	23	50,000
x113	2611	2700K	80	34	50,000
<b>x114</b>	<b>2631</b>	<b>3000K</b>	<b>80</b>	<b>34</b>	<b>50,000</b>
x116	2744	4000K	80	34	50,000

**B-K LIGHTING**

**MADE IN THE USA**

559.438.5800 | [INFO@BKLIGHTING.COM](mailto:INFO@BKLIGHTING.COM) | [BKLIGHTING.COM](http://BKLIGHTING.COM)

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.