

DATE: PROJECT: TYPE:

CATALOG NUMBER LOGIC:



Housing may be shipped ahead upon request.

*Yields up to 60% loss in output

**120V only

CATALOG NUMBER LOGIC

Example: MYK - I - LED - e190 - 1 - SD - B2 - 010 - MT - BLP

MATERIAL

Aluminum

SERIES

MYK - Mini Yukon Commercial Steplight

STYLE

I - Indirect

SOURCE

LED - Linear Array

LED TYPE

Available with Wide Throw

e190 - 8W/2700K/80CRI e194 - 8W/2700K/90CRI

e191 - 8W/3000K/80CRI e195 - 8W/3000K/90CRI

e192 - 8W/3500K/80CRI e202 - 7W/Amber

e193 - 8W/4000K/80CRI

Available with Forward Throw

e196 - 8W/2700K/80CRI e200 - 8W/2700K/90CRI

e197 - 8W/3000K/80CRI e201 - 8W/3000K/90CRI

e198 - 8W/3500K/80CRI e203 - 7W/Amber

e199 - 8W/4000K/80CRI

TYPE II OPTIC ORIENTATION

1 - Wide Throw

2 - Forward Throw

FACEPLATE

SD - Standard

BACKPLATE

B2 - Curved

BACKPLATE FINISH

(Blank) - Backplate finish matches faceplate finish

BLW - Black Wrinkle finish for glare reduction*

CONTROL TYPE

ELV - Dimming Driver (For use with Electronic Low Voltage Dimmer)**

INC - Dimming Driver (For use with Incandescent Dimmer)**

010 - Dimming Driver (For use with 0-10 Dimmer)

INPUT VOLTAGE

MT - 120-277 VAC


FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)


Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

DATE: _____ PROJECT: _____ TYPE: _____

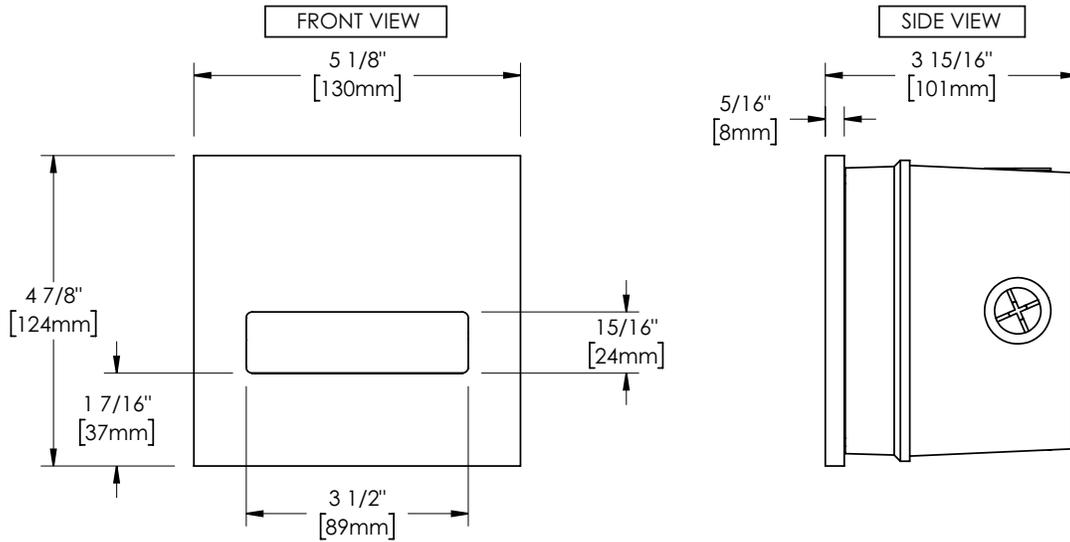

2 GANG BOX
7 ENTRY HOLES WITH 3/4" THREADS
6 PLUGS INCLUDED

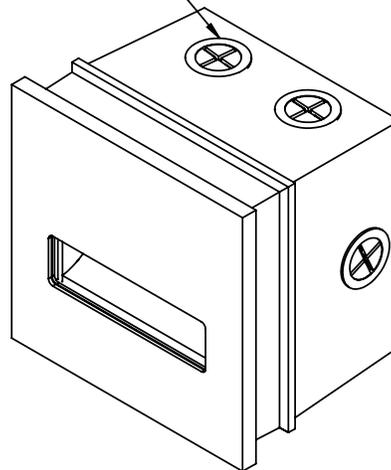


NOTES:

1. FIXTURE WEIGHT ≈ 3lbs

STANDARD FINISHES



PREMIUM FINISHES

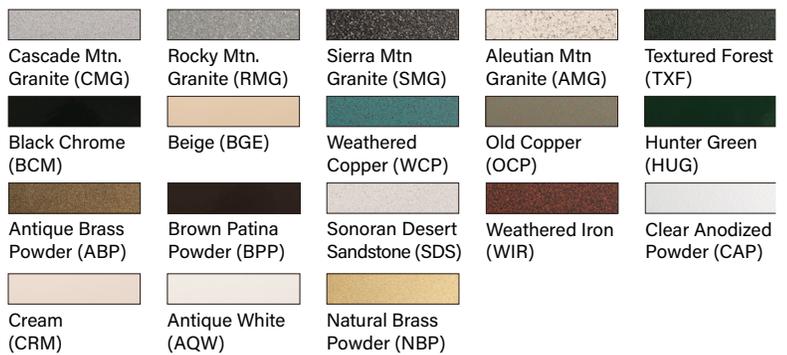

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

ELECTRICAL	WATTAGE	8W LEDs. 7W LEDs for Amber.
	OPERATING VOLTAGE	120-277 VAC
	WIRING	18GA Stranded, XLPE, 150°C, 600V wire.
	DRIVER	One (1) 750mA, Class II, constant current integral driver. 50/60 Hz. >0.9 Power Factor, 5A in-rush current (typical at 120 VAC), ≤20%THD (nominal at 120 VAC full load). Output over-voltage, over-current, and short circuit protection with auto recovery. Dimming driver for use with 0-10V, Incandescent, Standard TRIAC, or ELV dimmers. 10-100% range. *TRIAC/ELV dimming at 120 VAC only.
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6).
	HOUSING	Corrosion free composite, made from high strength, injection molded polycarbonate compound.
	WATER MANAGEMENT	Anti-condensation and pressure equalization vent provides a durable barrier to eliminate damage to internal components.
	FACEPLATE	Fully machined. Offered with non-visible, tamper-resistant set screws.
	FINISH	StarGuard®, our exclusive RoHS compliant 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating.
	WARRANTY	5-year limited warranty.
	CERTIFICATION & LISTING	UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4' of the ground. IP66 Rated. Made in the USA.
		  

B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

LAMP & DRIVER DATA (MINI YUKON - INDIRECT)

DATE: _____ PROJECT: _____ TYPE: _____

LM79 DATA

BK No.	CCT (Typ.)	CRI (Typ.)	Fixture Watts
e190	2700	80	8
e196	2700	80	8
e191	3000	80	8
e197	3000	80	8
e192	3500	80	8
e198	3500	80	8
e193	4000	80	8
e199	4000	80	8
e194	2700	90	8
e200	2700	90	8
e195	3000	90	8
e201	3000	90	8
e202	Amber	-	7
e203	Amber	-	7

L70 Data

50,000
50,000

OPTICAL DATA

Throw	Roadway Class	BUG	Del. Lumens	Multiplier
1 - Wide	Type II	B0 U3 G1	322	0.81
2 - Forward	Type II	B0 U3 G1	429	0.81
1 - Wide	Type II	B0 U3 G1	372	0.94
2 - Forward	Type II	B0 U3 G1	496	0.94
1 - Wide	Type II	B0 U3 G1	364	0.92
2 - Forward	Type II	B0 U3 G1	485	0.92
1 - Wide	Type II	B0 U3 G1	396	1.00
2 - Forward	Type II	B0 U3 G1	527	1.00
1 - Wide	Type II	B0 U3 G1	320	0.81
2 - Forward	Type II	B0 U3 G1	426	0.81
1 - Wide	Type II	B0 U3 G1	301	0.81
2 - Forward	Type II	B0 U3 G1	401	0.81
1 - Wide	Type II	B0 U2 G0	73	0.23
2 - Forward	Type II	B0 U2 G0	97	0.23

B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.