

DATE: _____ PROJECT: _____ TYPE: _____

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

MC - 512 - BLP

SERIES

MC - McKinley

LAMP TYPE

0 - By Others

510 - 6.5W/15DEG/2700K

511 - 6.5W/25DEG/2700K

512 - 6.5W/40DEG/2700K

513 - 6.5W/15DEG/3000K


514 - 6.5W/25DEG/3000K

515 - 6.5W/40DEG/3000K

516 - 6.5W/40DEG/4000K

FINISH (See below for full-color swatches)


Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

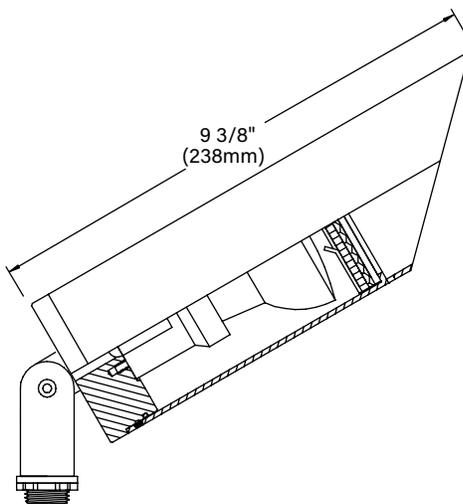

STANDARD FINISHES



Satin Black (BLP)



Satin Bronze (BZP)



Satin White (WHP)



Satin Aluminum (SAP)



Black Wrinkle (BLW)



Bronze Wrinkle (BZW)



White Wrinkle (WHW)



Verde (VER)

[Click here](#) to view larger color swatches of these finishes on our website



DATE: _____ PROJECT: _____ TYPE: _____


ACCESSORIES (Configure separately)



Power Pipe




Power Canopy



Tree Strap



Stems



Canopies

UPM

SPECIFICATIONS

ELECTRICAL	WATTAGE	6.5W
	SOCKET	Specification grade ceramic body lamp holder. Medium base, nickel-plated copper alloy lamp grip and screw shell. Corrosion resistant coil spring under center contact.
	WIRING	Teflon coated wire, 18 AWG, 600V, 250° C rated and certified to UL 1659 standard. Leads extended 6" beyond knuckle.
	LINE VOLTAGE	For use with 120V. No transformer required.
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6).
	BODY	Unibody design with enclosed, water-proof wireway and integral heat sink is fully machined from solid billet.
	KNUCKLE	LOCK Knuckle is comprised of two components. The first is integral to the body and features an interior, machined taper. The second is machined from solid billet and features a second, reverse angle taper. The resultant mechanical taper-lock allows a full 180° vertical adjustment without the use of serrated teeth, which inherently limit aiming. High temperature, silicone 'O' Ring provides water-tight seal and compressive resistance to maintain fixture position. Design withstands 73 lb. static load prior to movement to ensure decades of optical alignment. ½" pipe thread for mounting.
	CAP	Fully machined, 45° cap style that includes a weep-hole for water and debris drainage. Accommodates two (2) lens or louver media.
	LENS	Shock resistant, tempered, glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.
	LAMP TYPE	PAR20 Green Creative LED lamp, Title 20 compliant. Halogen sourced by others.
	WATER MANAGEMENT	Patented Anti-Condensation Valve (ASV) vacuum seals optical chamber and eliminates internal condensation. Spring loaded exterior mounted ACV button facilitates removal of vacuum sealed cap for lamp service. System re-initiates vacuum seal through normal fixture operation.
	HARDWARE	Tamper-resistant, stainless steel hardware. 360HD hardware is black oxide treated for additional corrosion resistance.
	FINISH	StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant.
	WARRANTY	5-year limited warranty.
CERTIFICATION & LISTING	ITL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4' of the ground. IP66 Rated. Made in the USA with sustainable processes.	

