

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:




*Two lamp choices required.


**Two lens/shielding choices required.

CATALOG NUMBER LOGIC
Example: MA - PAR30 - 0/0 - SAP - 9/9 - 11/11
MATERIAL
Aluminum
SERIES
MA - Mammoth
SOURCE
PAR30 - PAR30 Lamp
PAR38 - PAR38 Lamp
LAMP TYPE*
0 - PAR30/38 Halogen Lamp (Sourced by others)
PAR30 LED
520 - 11W/15DEG/2700K
521 - 11W/25DEG/2700K
522 - 11W/40DEG/2700K
523 - 11W/15DEG/3000K
524 - 11W/25DEG/3000K
525 - 11W/40DEG/3000K
526 - 11W/40DEG/4000K
PAR38 LED
530 - 15.5W/15DEG/2700K
531 - 15.5W/25DEG/2700K
532 - 15.5W/40DEG/2700K
533 - 15.5W/15DEG/3000K
534 - 15.5W/25DEG/3000K
535 - 15.5W/40DEG/3000K
536 - 15.5W/40DEG/4000K
FINISH (See page 2 for full-color swatches)
Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)
Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)
Also available in RAL Finishes
LENS TYPE**
9 - Clear (Standard)
10 - Spread 12 - Soft Focus 13 - Rectilinear
SHIELDING**
11 - Honeycomb Baffle


DATE: _____ PROJECT: _____ TYPE: _____

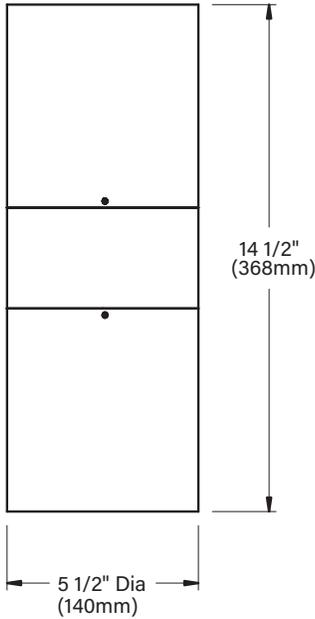


FRONT VIEW

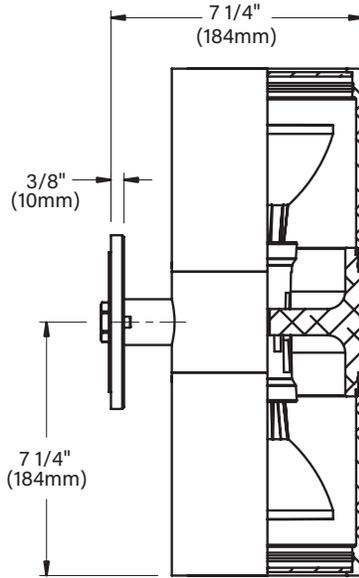

SIDE VIEW

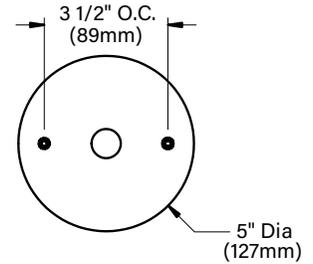

CANOPY DETAIL

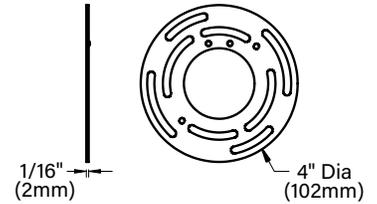


UNIVERSAL RING

STANDARD FINISHES



PREMIUM FINISHES

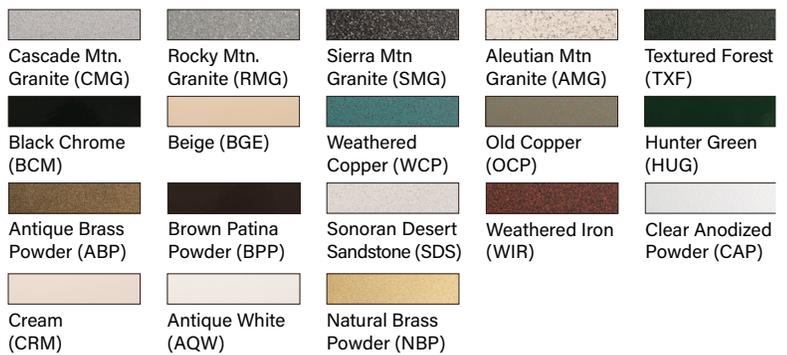

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

Drivers (Configure separately)

SPECIFICATIONS

ELECTRICAL	WATTAGE	PAR30 - 11W (2x) PAR38 - 15.5W (2x)
	SOCKET	Specification grade, ceramic body lamp holder. Medium base, nickel-plated copper alloy lamp grip and screw shell. Corrosion resistant coil spring under center contact.
	WIRING	Teflon® coated wire, 18AWG, 600V, 250° C rated and certified to UL1659 standard.
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6).
	BODY	Unibody design is fully machined from solid billet and provides enclosed, water-proof wireway and heat sink to maximize lamp life. Integral knuckle for maximum mechanical strength. High temperature, silicon 'O' Ring provides water-tight seal.
	CAP	Fully machined and accommodates two (2) lens or louver media per lamp.
	LENS	Shock-resistant, tempered glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.
	LAMP	For use with two (2) 75W maximum, PAR30 line voltage halogen lamps or two (2) 120W maximum, PAR38 line voltage halogen lamps - sourced by others.
	INSTALLATION	5" dia., machined canopy with stainless steel universal mounting ring permits mounting to 4" octagonal junction box (by others). Suitable for uplight or downlight installation.
	HARDWARE	Tamper-resistant, stainless steel hardware. LOCK aiming screw is black oxide treated for additional corrosion resistance.
	FINISH	StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. Brass components are available in powder coat or handcrafted metal finish. Stainless steel components are only available in handcrafted metal finish.
WARRANTY	5-year limited warranty.	
CERTIFICATION & LISTING	UL Listed. Certified to CAN/CSA/ANSI standards. IP66 rated. RoHS compliant. Suitable for indoor or outdoor use and in wet locations. Made in the USA with sustainable processes.	

