

DATE:	PROJECT:	TYPE:
-------	----------	-------

CATALOG NUMBER LOGIC:



**Includes stake, not available with Junction Box or transformer. Not compatible with fixtures that has 360HD knuckle.*

***For use with MR16 LED Lamps and Halogen Lamps.*

****For use with 3W-7W LED fixtures. 105-300 VAC. 50/60 Hz. non-dimming.*

*****Non-dimming.*

CATALOG NUMBER LOGIC

Example: PP - S12 - TRSS75 - BZW - B - 120 -SF

MATERIAL

(Blank) - Aluminum B - Brass S - Stainless Steel

SERIES

PP - Power Pipe System

TYPE

S12 - 12" Stake

S18 - 18" Stake

J12 - 12" Junction Box

J18 - 18" Junction Box

A18 - 18" Adjustable Stem*

TRANSFORMER HOUSING

(Blank) - Less Transformer Housing

TRSS75 - 75VA Electronic Transformer with Housing**

TRe20 - TRe20 Electronic Transformer with Housing***

FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

(Also available in RAL Finishes. See submittal SUB-1439-00)

Brass Finishes (MAC, POL, MIT)

Stainless Steel Finishes (MAC, POL)

CAP STYLE

(Blank) - Less Cap (Adjustable stem only)

B - Single Hole Cap

C - Solid Cap

INPUT VOLTAGE

(Blank) - For use with TRe20 Electronic Transformer***

120 - 120 VAC (For use with TRSS75)

230 - 230 VAC**** (Electronic only, for use with TRSS75)


277 - 277 VAC**** (For use with TRSS75)

OPTIONS


SF - Stability Flange

DATE: _____ PROJECT: _____ TYPE: _____


STAKE (S)

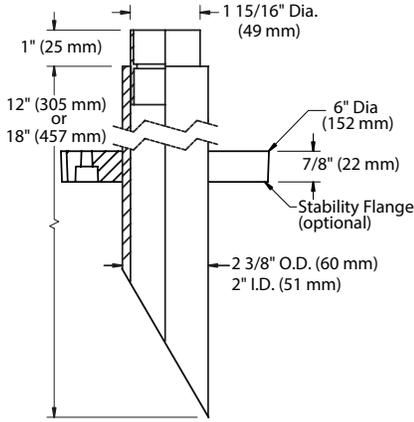

JUNCTION (J)

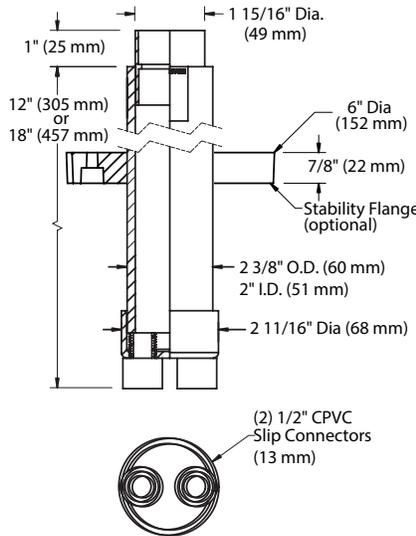


ADJUSTABLE STEM (A)

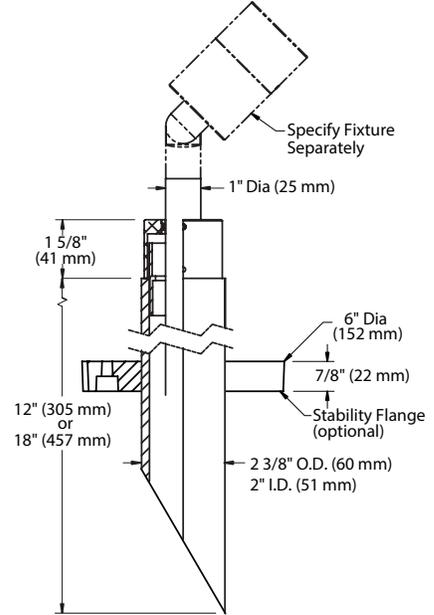


CAP STYLES

'B' Cap (Single Hole)




'C' Cap (Solid Cap)



TRANSFORMER

Transformer with Housing

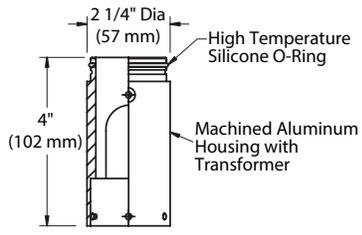

STANDARD FINISHES



PREMIUM FINISHES



[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

Electrical	WIRING	Teflon® coated wire, 18AWG, 600V, 250° C rated and certified to UL 1659 standard. Adjustable stem mount additionally includes 24" or 36" 12/2 direct burial low voltage cable.
	TRANSFORMER HOUSING	Fully machined from copper-free aluminum, solid machined brass or stainless steel. Stainless steel hardware. High temperature, silicone 'O' Ring provides watertight seal.
	ELECTRONIC TRANSFORMER	For use with halogen lamps. 120V, 230V, and 277V primary voltage. 120V is fully dimmable (40W minimum load). 50/60Hz. 11.6V secondary voltage. 10W minimum load (halogen) non-dimmed. 75 watt maximum load. >0.93 Power Factor. <20% THD. Operating frequency >10kHz. Soft start circuitry to extend lamp life.
	TRe20 ELECTRONIC TRANSFORMER	For use with solid state 12V systems. 105-300VAC primary voltage. 50/60Hz. Non-dimming. 20VA maximum load.
PHYSICAL	INSTALLATION	Provides a clean, architectural transition from wiring system to fixture. 2" Schedule 80 PVC pipe. For direct burial in soil or concrete. Available in 12" and 18" lengths. Available in three installation types:
	STAKE (TYPE S)	60° angled bottom designed for use with conduit or direct burial low voltage cable.
	JUNCTION BOX (TYPE J)	Includes two (2) 1/2" PVC slip connectors for branch circuit wiring.
	ADJUSTABLE STEM (TYPE A18)	18" field adjustable stem accommodates future landscape growth. Unused stem length remains hidden inside housing. Delrin bushing and stainless steel set screws lock mounting height.
	STABILITY FLANGE	Optional 6" diameter, molded stability flange simplifies installation and projects into substrate to simplify installation and reinforce housing stability.
	CAP STYLE	Machined from copper-free aluminum or machined brass.
	HARDWARE	Tamper-resistant, stainless steel hardware.
	FINISH	StarGuard, our 15-stage, chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant.
	WARRANTY	5-year limited warranty.
CERTIFICATION & LISTING	Certified to CAN/CSA/ANSI Standards. UL Listed. RoHS compliant. Made in USA with sustainable processes.	
  		

B-K LIGHTING
MADE IN THE USA

 559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM