

TRSS-75 MR16 LED LAMP (ELECTRONIC TRANSFORMER)

DATE: _____ PROJECT: _____ TYPE: _____

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

Example: TRSS-75 - 120

SERIES

TRSS-75 - TRSS-75 Electronic Transformer




VOLTAGE

120 - 120 VAC

230 - 230 VAC*

277 - 277 VAC*

*Non dimming.

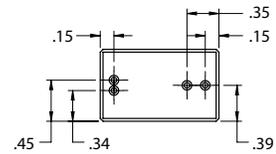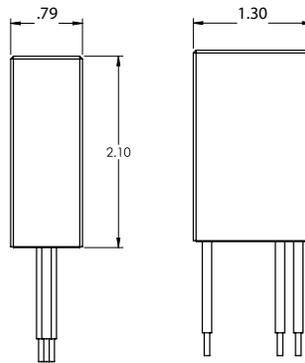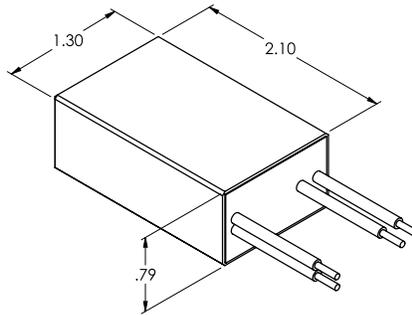

TRANSFORMER DATA

MR16 LED LAMP

Series	Input Voltage	Min. Load Dimmed	Min. Load Non-Dimmed	Max Load
TRSS-75	120V	20W	10W	75W
TRSS-75	230V	N/A	10W	75W
TRSS-75	277V	N/A	10W	75W

Notes: 1. Operating ambient temperature range -10° F to 130° F.
2. Not to exceed 8 foot overall wiring distance using 12 gauge copper wire.

B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

08/13/2020 SKU-501
SUB-001085

TRSS-75 MR16 LED LAMP (ELECTRONIC TRANSFORMER)

DATE:	PROJECT:	TYPE:
-------	----------	-------

ACCESSORIES (Configure separately)

SPECIFICATIONS

ELECTRICAL	ELECTRONIC TRANSFORMER	For use with halogen lamps. 120V, 230V, and 277V primary voltage. 120V is fully dimmable (20W minimum load). 50/60Hz. 11.6V secondary voltage. 10 watt minimum load non-dimmed. 75 watt maximum load. >0.93 Power Factor. <20% THD. Operating frequency >10kHz. Soft start circuitry to extend lamp life.
PHYSICAL	HOUSING WARRANTY LISTINGS	Fully encapsulated, flame retardant plastic casing. Class A Insulation. For use in weather proof enclosure. Suitable for use in ambient temperatures ranging from -10°F to 130°F. 5 year limited warranty. UL and CSA listed.



B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM