

| | | |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|

CATALOG NUMBER LOGIC:



CATALOG NUMBER LOGIC

Example: PPII - S12 - D12INC - BZW - B - MT - SF

MATERIAL

Aluminum

SERIES

PPII - Power Pipe II System

TYPE

S12 - 12" Stake*

S18 - 18" Stake*

J12 - 12" Junction Box*

J18 - 18" Junction Box*

DRIVER TYPE**

D12INC - 12W Dimming Driver

D20INC - 20W Dimming Driver

D27INC - 27W Dimming Driver

FINISH

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

(Also available in RAL Finishes. See submittal SUB-1439-00)

CAP STYLE

B - Single Hole Cap

INPUT VOLTAGE

MT - 120-277 VAC


OPTIONS

SF - Stability Flange


**Includes 12" or 18" Power Pipe with driver housing.*

***For use with incandescent dimmer. 120V only for dimming. Driver wattage must match fixture wattage.*


DATE: _____ PROJECT: _____ TYPE: _____

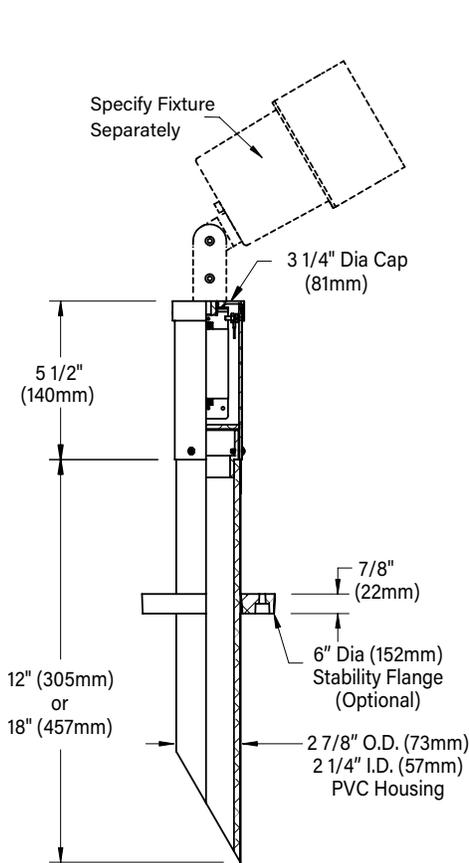


STAKE (S)

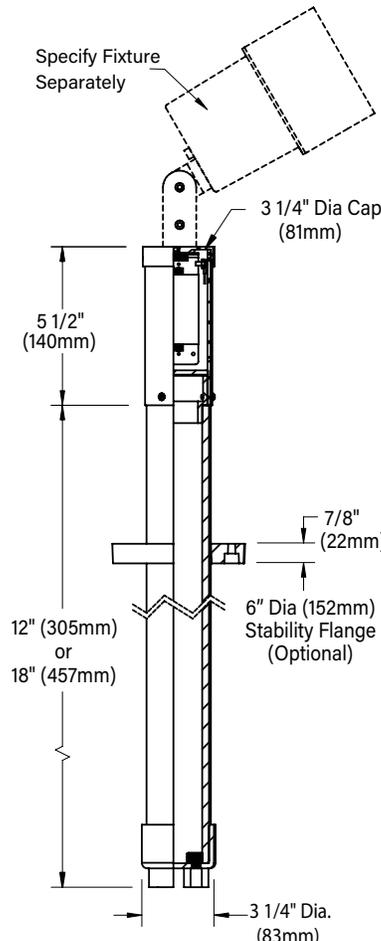

JUNCTION (J)

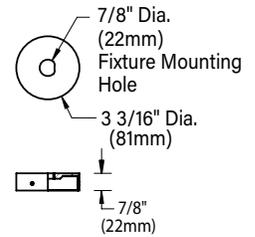

CAP STYLE
'B' Cap (Single Hole)

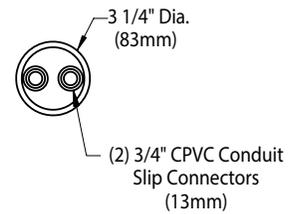


Bottom View of "J"

STANDARD FINISHES



PREMIUM FINISHES

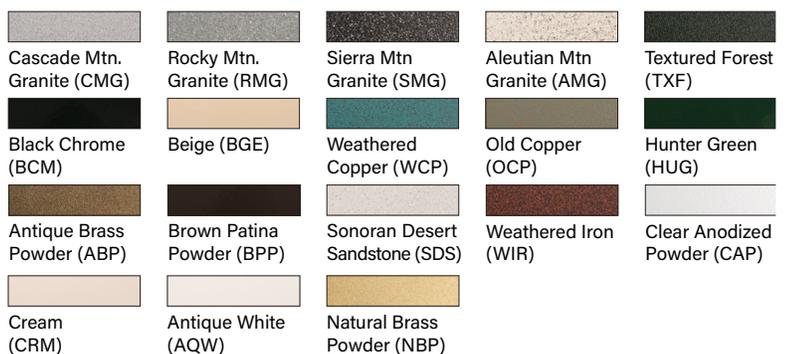

[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

| | | |
|-------|----------|-------|
| DATE: | PROJECT: | TYPE: |
|-------|----------|-------|

ACCESSORIES (Configure separately)

SPECIFICATIONS

| | | |
|------------|--|--|
| Electrical | <p>WIRING</p> <p>DRIVER</p> | <p>Teflon® coated wire, 18AWG, 600V, 250° C rated and certified to UL 1659 standard.</p> <p>For use with 700mA (D12, D20, D27), Class A, constant current driver. 120-277VAC (nominal) primary input voltage. 50/60Hz. >0.94 Power Factor, 6A in-rush current, 0.25A input current, .5%THD (nominal at 120VAC full load). Output over-voltage, over-current, and short circuit protection with auto recovery. EMC: FCC47CFR Part 15 Class B compliant. Dimming driver for use with standard incandescent dimmers. 10-100% range.</p> |
| PHYSICAL | <p>INSTALLATION</p> <p>STAKE (TYPE S)</p> <p>JUNCTION BOX (TYPE J)</p> <p>STABILITY FLANGE</p> <p>CAP STYLE</p> <p>DRIVER HOUSING</p> <p>HARDWARE</p> <p>FINISH</p> <p>WARRANTY</p> <p>CERTIFICATION & LISTING</p> | <p>Provides a clean, architectural transition from wiring system to fixture. 2" Schedule 80 PVC pipe. For direct burial in soil or concrete. Available in 12" and 18" lengths. Available in three installation types:</p> <p>60° angled bottom designed for use with conduit or direct burial low voltage cable.</p> <p>Includes two (2) 3/4" PVC slip connectors for branch circuit wiring.</p> <p>Optional 6" diameter, molded stability flange simplifies installation and projects into substrate to simplify installation and reinforce housing stability.</p> <p>Machined from copper-free aluminum.</p> <p>Fully machined from copper-free aluminum. Stainless steel hardware. High temperature, silicone 'O' Ring provides watertight seal.</p> <p>Tamper-resistant, stainless steel hardware.</p> <p>StarGuard, our 15-stage, chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant.</p> <p>5-year limited warranty.</p> <p>Certified to CAN/CSA/ANSI Standards. UL Listed. RoHS compliant. Made in USA with sustainable processes.</p> |

