

DATE: PROJECT: TYPE:

CATALOG NUMBER LOGIC:



Driver housing required. Configure separately.

**Accommodates up to 2 lens/shielding media.*

CATALOG NUMBER LOGIC

Example: OL - LED - x58 - SP/FL - BLP - 9/10 - 11/11 - B

MATERIAL

Aluminum

SERIES

OL - Olympus

SOURCE

LED - Chip on Board Technology

LED TYPE (Wattages Up/Down must be the same)

x58 - 12W/2700K/80CRI	x62 - 20W/3000K/80CRI	x66 - 27W/4000K/80CRI	
x59 - 12W/3000K/80CRI	x63 - 20W/4000K/80CRI	x67 - 27W/2700K/90CRI	✓
x60 - 12W/4000K/80CRI	x64 - 27W/2700K/80CRI	x68 - 27W/3000K/90CRI	✓
x61 - 20W/2700K/80CRI	x65 - 27W/3000K/80CRI	x69 - 27W/3500K/80CRI	

OPTICS (Select Up/Down)

SP - Spot (15°) FL - Flood (35°) WFL - Wide Flood (60°)

FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR)

Also available in RAL Finishes

LENS TYPE (Select Up and Down)*

9 - Clear (Standard)
 10 - Spread 12 - Soft Focus 13 - Rectilinear

SHIELDING (Select Up and Down)*

11 - Honeycomb Baffle


CAP STYLE

A - 45°
 B - 90°
 C - Flush Lens
 D - 45° Less Weephole (Interior use only)
 E - 90° Less Weephole (Interior use only)




TITLE 24, JA8 COMPLIANT


DATE: _____ PROJECT: _____ TYPE: _____

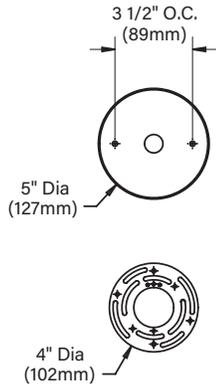




"A/D" CAP

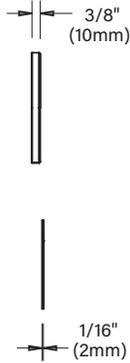

"B/E" CAP

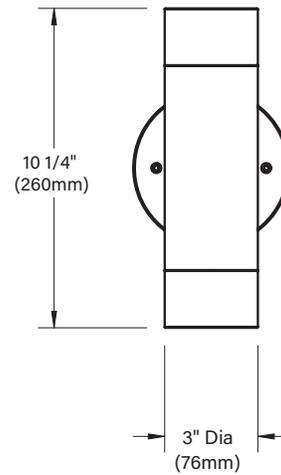


"C" CAP

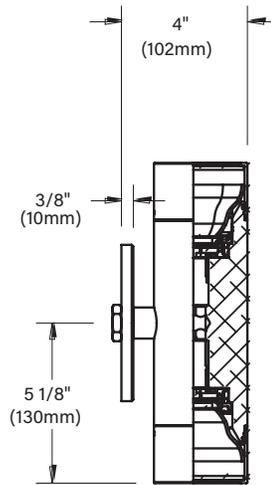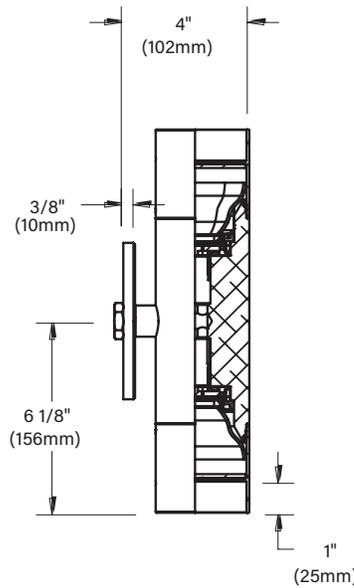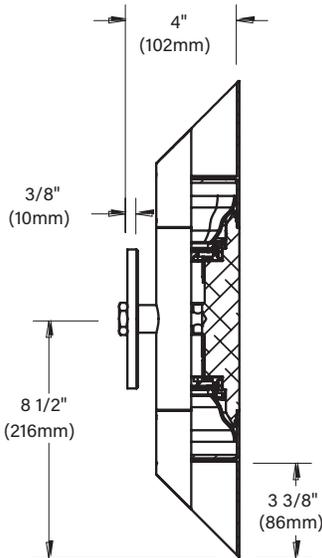

STANDARD FINISHES



PREMIUM FINISHES

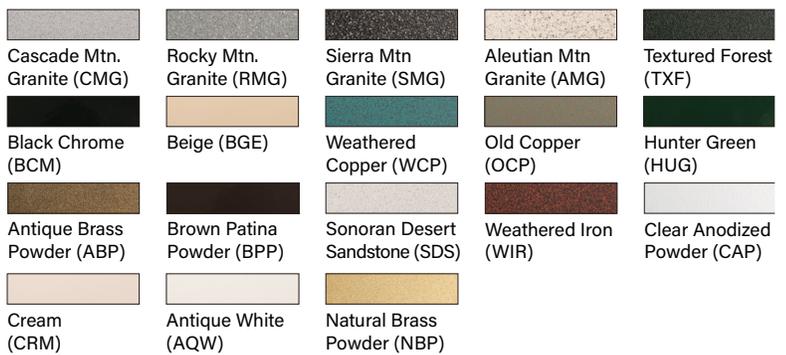


[Click Here](#) to view larger, full-color swatches of all available finishes on our website.

DATE: _____ PROJECT: _____ TYPE: _____

ACCESSORIES (Configure separately)

Drivers (Configure separately)



SPECIFICATIONS

ELECTRICAL	WATTAGE WIRING REMOTE DRIVER	(2x) 12W, 20W, OR 27W Stranded XLPE, 18GA, 600V, 150°C, wire rated to UL3321. For use with remote LED driver. See remote driver submittal to determine remote distance and wiring requirements prior to detailing field installation of any remote wiring.
PHYSICAL	MATERIALS BODY CAP LENS LED COLOR MANAGEMENT INSTALLATION OPTICS HARDWARE FINISH WARRANTY CERTIFICATION & LISTING	Furnished in copper-free aluminum (6061-T6). Unibody design with enclosed, water-proof wireway and integral heat sink is fully machined from solid billet. Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components. Fully machined and accommodates two (2) lens or louver media. Shock-resistant, tempered glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment. Integrated solid state system is scalable for field upgrade, provides long life, significant energy reduction and exceptional thermal management. Title 24, JA8 compliant. Modular design with electrical quick disconnects permit field maintenance. Minimum 50,000 hour rated life at 70% of initial lumens (L70). Corrected cold phosphor technology delivers near-perfect natural white light. Long term phosphor maintenance over product life. Exact color point conformity exceeds ANSI C78.377 standard. Provides uniform beam with no color variation over angle. Module exceeds 80 CRI (RA>80, R9>16). 5" dia., machined canopy with stainless steel universal mounting ring permits mounting to 4" octagonal junction box (by others). Interchangeable OPTIKIT modules permit optical field changes. Tamper-resistant, stainless steel hardware. Canopy mounting screws are black oxide treated for additional corrosion resistance StarGuard, our 15-stage chromate-free process cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating and is RoHS compliant. 5-year limited warranty. UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant. Title 24, JA8 compliant. Suitable for indoor or outdoor use, in wet locations, and for installation within 4' of the ground. IP66 Rated. Made in the USA with sustainable processes.

